

S3 Turbo



WITH BROADBAND
LAMBDA PROBE AND
AUTOMATIC AIR CONTROL

From a renowned company

For more than 55 years Froling has specialised in the efficient use of wood as a source of energy. Today the name Froling stands for modern biomass heating technology. Froling firewood, wood chip and pellet boilers are successfully in operation all over Europe. All of our products are manufactured in our factories in Austria and Germany. Our extensive service network guarantees full coverage and reliability.




S3 Turbo: Top-quality boiler technology at a very competitive price

The S3 Turbo is North America's leading firewood boiler. It includes all features found on high-end European firewood boilers.

- Patented, cylindrical high-temperature turbulence combustion chamber for excellent combustion values.
- Separate pre-heating chamber door for easy pre-heating.
- Carbonisation gas extraction system for smoke-free reloading.
- Speed-regulated induced draught fan for output control and full operating safety.



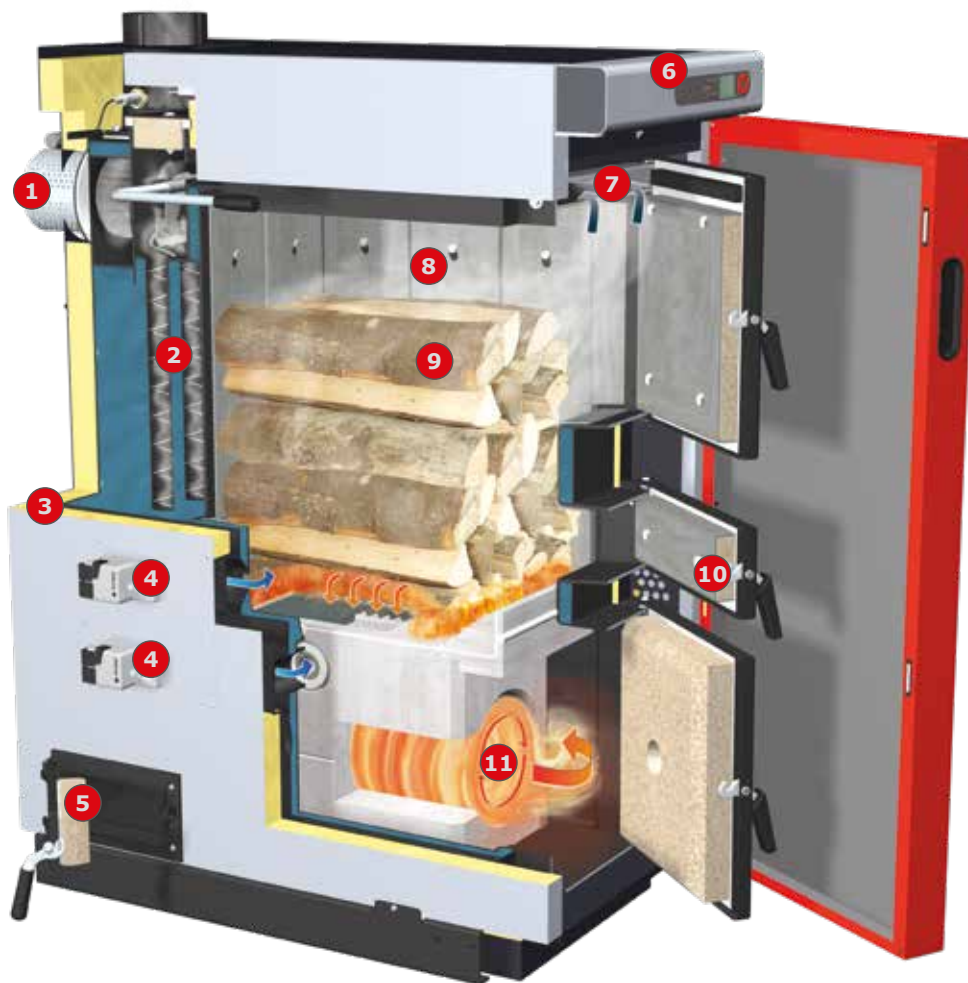

The firewood boiler with special benefits:

- 1 Speed-regulated induced draught fan for maximum ease of use.
- 2 WOS (efficiency optimisation system) for high efficiency and easy cleaning.
- 3 Top quality thermal insulation.
- 4 Manual adjusters (or actuators with Lambdatronic) for primary and secondary air.
- 5 Large maintenance openings for easy cleaning.
- 6 Lambdatronic controller
- 7 Carbonisation gas extraction system prevents flue gas from escaping during reloading.
- 8 Aprons (hot cladding) to protect the inner wall of the boiler for a longer service life.
- 9 Large fuel loading chamber for half-metre logs ensures long reloading intervals.
- 10 Separate pre-heating chamber door for easy pre-heating.
- 11 Patented high-temperature turbulence combustion chamber ensures low emissions.

A successful design



Feature: Large fuel loading chamber for half-metre logs

- Advantages:
- Easy front-loading
 - Long combustion time
 - Long reloading intervals

The S3 Turbo can be loaded with half-metre firewood easily from the front. The loading chamber is 55 cm deep and has a generous reserve of space. Often it is only necessary to fill the boiler once a day. Strong steel guards protect the loading chamber and keep it clean.

Feature: High-temperature turbulence combustion chamber

- Advantages:
- Excellent combustion values
 - Low emissions
 - Much more environmentally friendly

Froling uses the patented, cylindrical high-temperature turbulence combustion chamber in the S3 Turbo. This means the boiler delivers excellent combustion values. The generous dimensions of the combustion zone guarantee low emissions. So by using a Froling S3 Turbo you are helping to keeping our air clean.

Feature: WOS system

- Advantages:
- Even greater efficiency
 - Easy cleaning from outside
 - Fuel savings

The WOS (efficiency optimisation system) consists of special turbulators, which are placed in the heat exchanger pipes. The lever arm mechanism ensures easy cleaning of the heating surfaces from outside. An additional benefit: clean heating surfaces lower energy consumption.







Feature: Special carbonisation gas extraction system

- Advantages:
- No flue gas escapes during reloading
 - The boiler room stays clean

The special carbonisation gas extraction system also prevents any gas from escaping when refilling. This is applicable at every stage of combustion. Enjoy modern heating with wood!

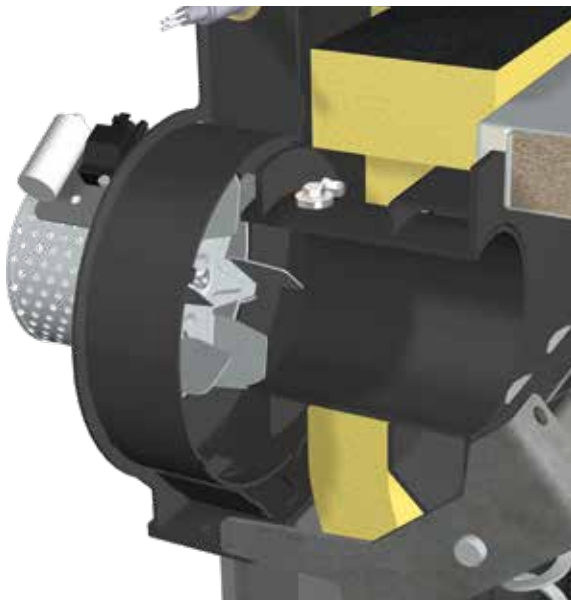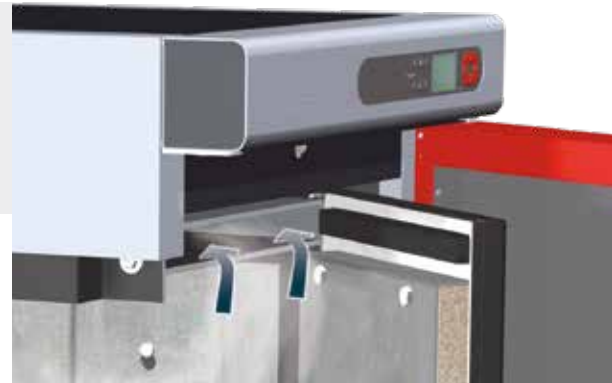

Feature: Speed-regulated induced draught fan

- Advantages:
- Easy to operate
 - Adapts to all operating conditions
 - Full operating safety

The primary and secondary air settings are adjusted by the technician during commissioning. The function-monitored induced draught fan enables the system to adjust to different operating conditions. This offers excellent output adjustment with full operating safety. In the S3 Turbo with broadband lambda probe the primary and secondary air settings are adjusted by means of servo-motors, ensuring that output is adapted to given requirements at every stage of combustion.

System convenience

S-Tronic Lambda



Advantages:

- Speed regulation and function monitoring of the induced draught fan for output adjustment
- Lambda control with broadband lambda probe
- Control of primary and secondary air via 2 servo-motors
- Integrated storage tank management
- Visual display with control keys for setting
- Can be used to control 2 mixed heating circuits
- Integrated boiler management



Froling FRA room temperature sensor / RBG 3200/RGB 3200 Touch room console

The main modes of the designated heating circuit can be easily adjusted and selected using the Froling **FRA room temperature sensor**. The adjusting wheel allows you to change the room temperature by up to $\pm 3^{\circ}\text{C}$.



The **RBG 3200/RGB 3200 Touch room console** makes the system even easier to use. You can control the heating system easily from your living room. The important system data is clearly displayed and changes can be set at the push of a button.

Firewood reload calculation

Too much firewood can result in fuel that is not completely burnt despite the storage tank being loaded. The integrated reload calculation can be used through simple parameterization of the storage tank type and the storage tank volume. Taking into account the current storage tank charge, the boiler control calculates the missing energy. When the boiler door is opened, the required amount of fuel for loading the storage tank is displayed in kilogrammes.




The **Lambdatronic controllers** allow for efficient energy management. Up to 4 storage tanks, up to 8 hot water tanks and up to 18 heating circuits can be integrated into the heating management system. You also benefit from the ability to integrate other means of energy production, such as solar panels.

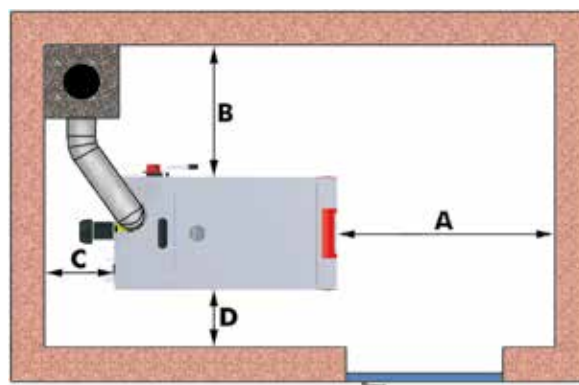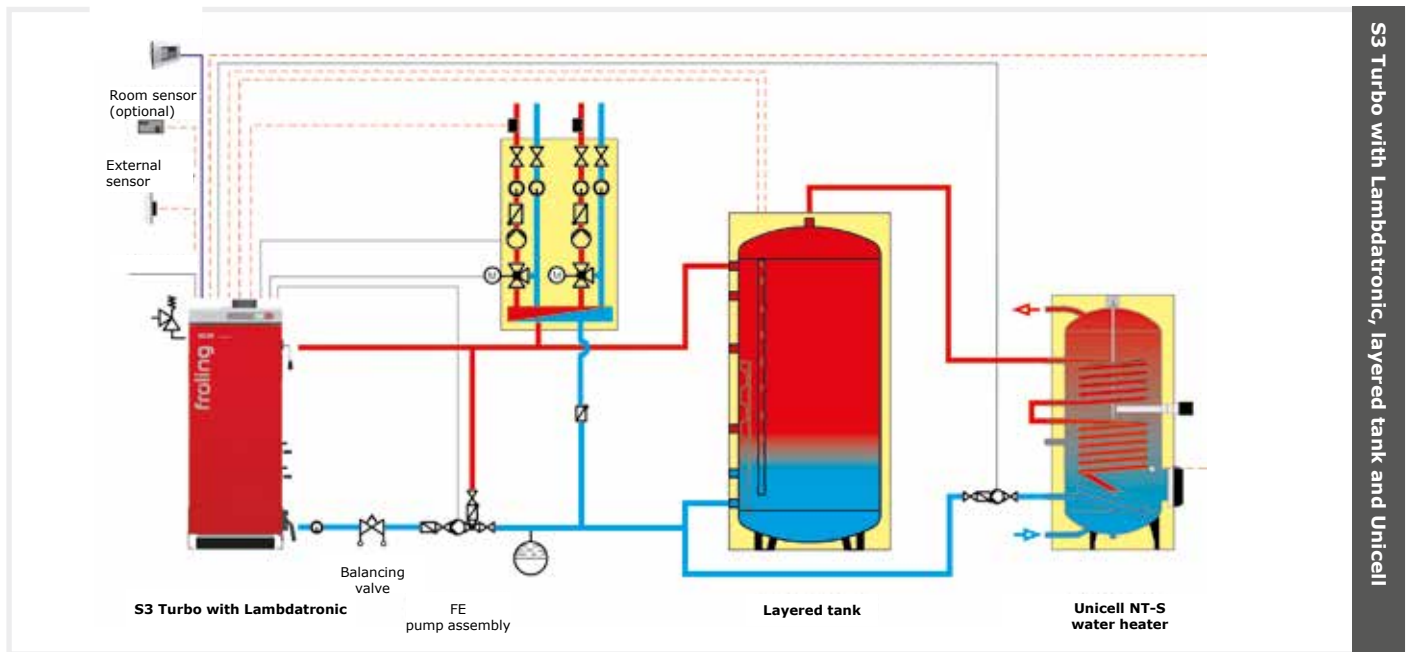

Minimum distances in the boiler room		30-50
A	Distance - front of boiler to wall	36" (900 mm)
B	Distance - side of boiler to wall	32" (800 mm ¹)
C	Distance - back to wall	14" (500 mm)
D	Distance - side of boiler to wall	9" (200 mm ¹)
Distance between ceiling and boiler		18" (460 mm)

¹ The side of the boiler where the WOS lever is located (B or D) should be at least 800 mm from the wall to allow easy access for connecting the appliance and for maintenance work (e.g. induced draught).

Technical data

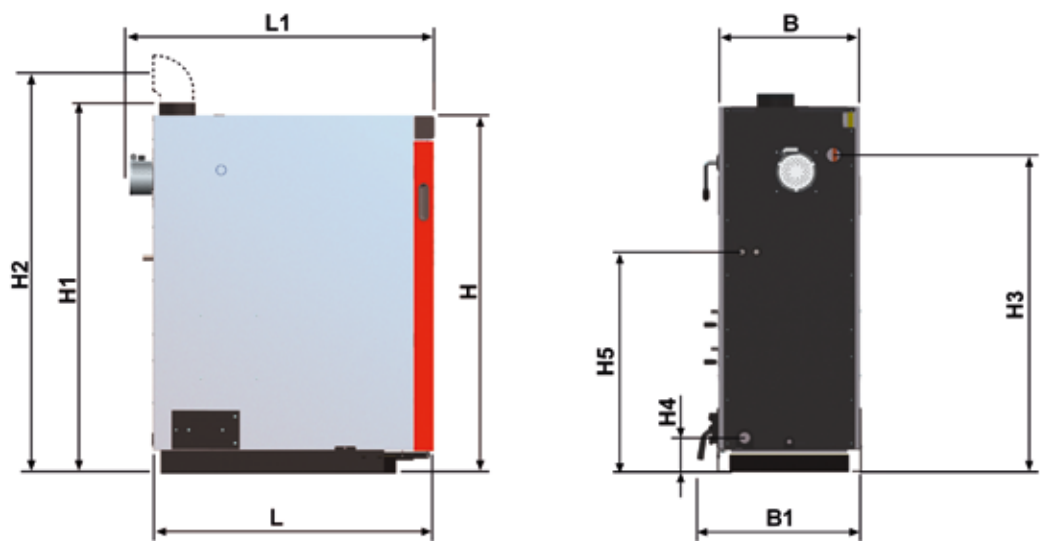

Dimensions - S3 Turbo		[mm]	30	50
L	Length of boiler		1160	1250
L1	Total length including induced draught fan		1260	1350
B	Width of boiler		570	670
B1	Total width including side cleaning door		680	780
H	Height of boiler		1470	1570
H1	Total height including flue gas pipe		1530	1630
H2	Height of flue pipe connection		1635	1735
H3	Flow connection		1280	1380
H4	Return connection		140	140
H5	Safety heat exchanger connection		890	970
	Flue pipe diameter		149	149

Technical specifications - S3 Turbo			30	50
Nominal output	[kW / Btu/h]		30/102,500	50/170,000
Fuel loading chamber capacity	[l/gal]		140/37	210/55
Fuel loading door (width/height)	[mm]		330/370	330/370
Water capacity	[l/gal]		120/32	190/50
Boiler weight incl. controller and insulation	[kg/lbs]		530/1170	620/1370

* Composite label (boiler + controls)

Your Froling partner:



Heizkessel- und Behälterbau GesmbH
A-4710 Grieskirchen, Industriestr. 12

AT: Tel +43 (0) 7248 606 • Fax +43 (0) 7248 606-600
DE: Tel +49 (0) 89 927 926-0 • Fax +49 (0) 89 927 926-219
E-mail: info@froeling.com • Internet: www.froeling.com

P0310818 - All illustrations intended as a guide only.
We reserve the right to make technical changes without prior notice. Errors and omissions excepted.
Source for third party images: www.aboutpixel.de